



DP2^{power}

IT DOESN'T BLOW BUBBLES – THE ERGONOMIC POWER NUTRUNNER

The DP2^{power} pneumatic nutrunner is powerful, robust and easy to use: Simply set the pressure on the maintenance unit using the values in the torque chart and get straight to work.

With the DP2^{power}, you have the perfect nutrunner at hand when it's not just about precision, but also about power and performance in continuous use.



+ POWER

Nominal torque at low pressure

+ COMPACT DESIGN

Especially compact and lightweight design

+ ERGONOMIC

Low-noise and low-vibration operation

ALSO
AVAILABLE
AS AN ATEX
VERSION



II 2 G EX H IIB T6 GB
II 2 D EX H IIIC DB 85 °C



+ POWER

- ▶ Torque up to 8,000 Nm
- ▶ Durable and robust thanks to high-quality components, suitable for continuous use
- ▶ Nominal torque is reached at low pressure

+ ERGONOMIC


- ▶ 360° rotatable drive
- ▶ Low noise and low vibration: Ergonomic working and minimal strain on the user
- ▶ Compact dimensions thanks to short drive unit – for low weight and high performance

+ BONUS

- ▶ Torque accuracy through compensation of pressure fluctuations
- ▶ Also available as an ATEX version for use in potentially explosive atmospheres




MODELS // DATA

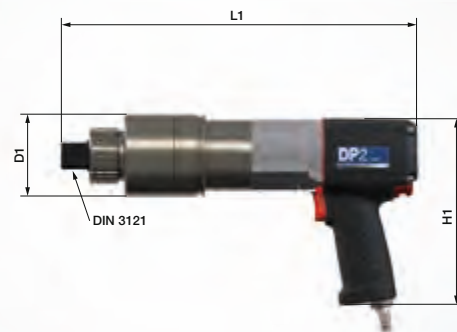

DP2

Typ Type	Max. Drehmoment Max. torque		Max. Betriebsdruck Max. pressure		L1		H1		D1		Z	Drehzahl Max. speed		Gewicht* Weight*		Vierkant Square-drive	
	Nm	ft-lbs	bar	psi	mm	inch	mm	inch	mm	inch		U/min	rpm	kg	lbs	Zoll	inch
DP2-05	550	406	6	87	290	11.42	181	7.13	68,5	2.70	26	26,7	4,7	10.4	3/4"		
DP2-10	1.000	740	6	87	306	12.05	181	7.13	68,5	2.70	26	11,9	4,9	10.8	3/4"		
DP2-20	2.000	1,480	6	87	330	12.99	181	7.13	80,0	3.15	26	5,4	6,0	13.2	1"		
DP2-30	3.000	2,210	6	87	346	13.62	181	7.13	80,0	3.15	26	3,4	6,6	14.6	1"		
DP2-36	3.600	2,660	6	87	346	13.62	181	7.13	80,0	3.15	26	3,1	6,6	14.6	1"		
DP2-48	4.800	3,540	6	87	378	14.88	181	7.13	86,0	3.39	45	1,1	8,6	19.0	1 1/2"		
DP2-80	8.000	5,900	6	87	446	17.56	181	7.13	101,0	3.98	39	1,1	12,7	28.0	1 1/2"		

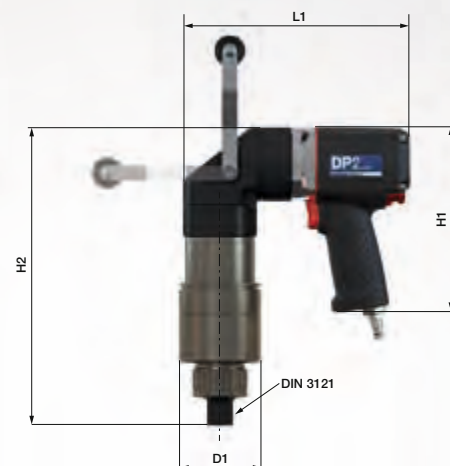

DP2 ANGLE VERSION

Typ Type	Max. Drehmoment Max. torque		Max. Betriebsdruck Max. pressure		L1		H1		H2		D1		Z	Drehzahl Max. speed		Gewicht* Weight*		Vierkant Square-drive	
	Nm	ft-lbs	bar	psi	mm	inch	mm	inch	mm	inch	mm	inch		U/min	rpm	kg	lbs	Zoll	inch
DP2-05-W	550	406	6	87	220	8.66	181	7.13	237	X.XX	68,5	2.70	26	26,7	4,7	10.4	3/4"		
DP2-10-W	1.000	740	6	87	220	8.66	181	7.13	253	X.XX	68,5	2.70	26	11,9	4,9	10.8	3/4"		
DP2-20-W	2.000	1,480	6	87	226	8.90	181	7.13	277	X.XX	80,0	3.15	26	5,4	6,0	13.2	1"		
DP2-30-W	3.000	2,210	6	87	226	8.90	181	7.13	292	X.XX	80,0	3.15	26	3,4	6,6	14.6	1"		
DP2-36-W	3.600	2,660	6	87	226	8.90	181	7.13	292	X.XX	80,0	3.15	26	3,1	6,6	14.6	1"		
DP2-48-W	4.800	3,540	6	87	229	9.02	181	7.13	324	X.XX	86,0	3.39	45	1,1	8,6	19.0	1 1/2"		
DP2-80-W	8.000	5,900	6	87	236	9.29	181	7.13	392	X.XX	101,0	3.98	39	1,1	12,7	28.0	1 1/2"		

Repeat accuracy: ≤ 4%, depending on the bolted joint. Technical data without guarantee.

*Specification without reaction arm.