K Series

THE ULTIMATE PROBLEM SOLVER FOR SPECIAL CASES AND CONFINED SPACES

- One product, hundreds of possible uses: quick and easy change of the ring spanner for customised applications
- The special device from Plarad: no comparable tool system on the market
- Tightest diameters and high insertion depths of the spanner inserts
- Open and split ring spanners for special applications
- Wide range of bolting options thanks to large range of accessories
- Low weight with high performance
- Torque range from 300 to 30,000 Nm
- Up to 800 bar system pressure

Various inserts available as accessories

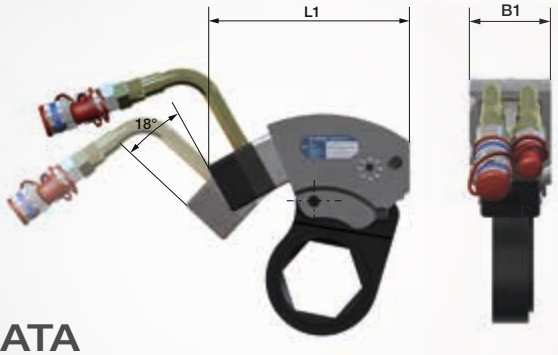

MODELS // DATA

Typ *Type*	max. Drehmoment *Torque max.*		max. Betriebsdruck *Pressure max.*		SW *A/F*		L1		B1		Gewicht* *Weight**	
	Nm	ft-lbs	bar	psi	min	max	mm	inch	mm	inch	kg	lbs
K 30 TF	3.000	2,213	800	11,600	24	90	163,0	6.42	25	0.98	6,0	13.2
K 60 TF	6.600	4,868	800	11,600	24	90	170,0	6.69	30	1.18	7,3	16.1
K 150 TF	11.000	8,114	800	11,600	27	110	180,0	7.09	45	1.77	11,6	25.6
K 200 TF	20.000	14,752	800	11,600	60	135	248,5	9.78	70	2.76	30,5	67.2
K 300 TF	30.000	22,128	800	11,600	80	150	319,0	12.56	120	4.72	38,0	83.8

Repeat accuracy: ≤ 4%, depending on the bolted joint. Technical data without guarantee.