

TXE1docu

THE HIGH-END SOLUTION FOR TENSION CYLINDERS

The TXE1docu has numerous additional features to ensure comprehensive documentation. The transfer of data to digital devices enables transparent recording of tensioning processes.

Automatic re-pumping in the event of a pressure drop makes this unit extremely user-friendly. The remote control with colour display allows users to keep an eye on important operating parameters at all times.




INDIVIDUAL

Fast and reliable work thanks to predefined bolting cases



HIGH TECH


Automatic re-pumping ensures safe and qualitative connections



Hydraulic power packs **without** tensioner mode



Plarad power packs **with** tensioner mode

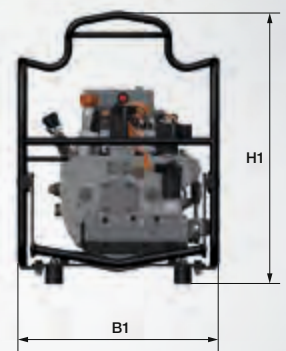

MODELS // DATA

Typ Type	Betriebsart Operation mode	max. Betriebsdruck Pressure max.		max. Durchfluss flow max.		Motorleistung Motor power		Maße (L1 x B1 x H1) Dimensions (L1 x B1 x H1)	Gewicht* Weight*	
		bar	psi	l/min	gal/min	kW	hp		kg	lbs
TXE1docu 10	Automatik automatic	1.500	21,756	0,8	0.21	0,8	1.07	450 x 317 x 366 mm 17.7 x 12.5 x 14.4 in	38	84
TXE1docu 30	Automatik automatic	1.500	21,756	1,0	0.26	2,2	2.95	500 x 343 x 465 mm 19.7 x 13.5 x 18.3 in	41	90

Repeat accuracy: ≤ 4%, depending on the bolted joint. Technical data without guarantee.