

XE1eco

POWERFUL BASIC PUMP

The entry-level power pack for manual operation of hydraulic tools. With an optional 2-stage version for high bolting speed, it delivers optimal performance. The user-friendly remote control allows monitoring of key operating parameters, such as motor/oil temperature, operating hours, and power consumption.

Thanks to patented motor-under-oil technology, it operates efficiently and reliably. Its robust design and optimised maintenance intervals ensure high cost-effectiveness.




2-STAGE-UPGRADE
OPTIONAL GEAR PUMP
FOR MAXIMUM FLOW RATE

- 1

EFFICIENCY
External oil filter and service-friendly design for simplified maintenance work
- 2

ROBUST
Steady and robust industrial frame protects against damage
- 3

FLEXIBLE
Use of single or multiple hydraulic wrenches in single and dual-hose technology

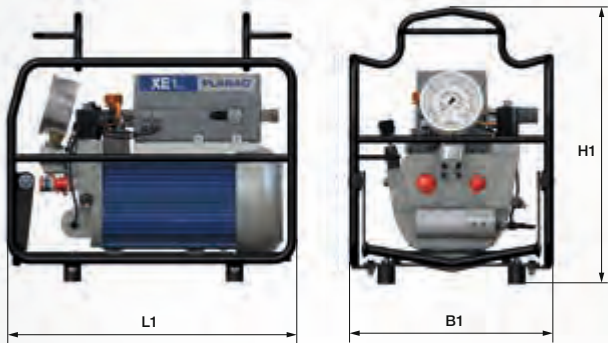

MODELS // DATA

Type Type	Betriebsart Operation mode	max. Betriebsdruck Pressure max.		max. Durchfluss flow max.		max. Durchfluss flow max. (2-Stage Upgrade)		Motorleistung Motor power		Maße (L1 x B1 x H1) Dimensions (L1 x B1 x H1)	Gewicht* Weight*	
		bar	psi	l/min	gal/min	l/min	gal/min	kW	hp		kg	lbs
XE1eco 10	Manuell manual	800	11,600	0,8	0.21	5,4	1.43	0,8	1.07	455 x 286 x 449 mm 17.91 x 11.26 x 17.68 in	22	48.5
XE1eco 20	Manuell manual	800	11,600	1,2	0.32	8,0	2.11	1,1	1.48	500 x 343 x 465 mm 19.69 x 13.50 x 18.31 in	29	63.9
XE1eco 30	Manuell manual	800	11,600	3,0	0.79	13,2	3.49	2,2	2.95	500 x 343 x 465 mm 19.69 x 13.50 x 18.31 in	35	77.2

Repeat accuracy: ≤ 4%, depending on the bolted joint. Technical data without guarantee.
Units available in the following voltages: 110V 50Hz, 110V 60Hz, 230V 50Hz, 230V 60Hz, 400V 50Hz, 400V 60Hz. Others on request.