



MLP 90 E Minilifter

**Capacity 90 kg,
Lifting height 1568 mm**

The Minilifter is designed to be maneuverable and versatile for indoor use, where small loads are lifted frequently. It has a low unit weight and non-marking tyres that make it an indispensable tool in many areas.

The stepless adjustable handlebars provide a comfortable grip for the user.

Features

- For easy and safe maneuvering, it has 4 swivel castors, 2 of which are fitted with parking brakes.
- The forward wheel arms clear under Euro pallets.
- Electric lifting and lowering function with soft start.
- The ergonomic push handle is infinitely height-adjustable.
- Cable remote control with spiral cable.
- The connection system makes it possible to use various, optionally available load handling attachments.
- Maintenance-free, precision lead screw and nut for many years of reliable service. The safety slip clutch protects the drive in both directions.
- The lowering safety cut-out eliminates accidental crushing and entrapment when lowering the platform.
- The electronic overload protection effectively prevents accidental lifting of excessive load.
- Maintenance-free battery that can be charged at any socket.
- Robust construction with chrome plated chassis, hard chromium plated piston and pressure relief valve.
- Covered chain deflection for increased safety.

Optional


- Swiveling V-block with platform for roller material.
- Mandrel for roller material.

Scope of delivery

- Integrated battery 24 V, 7.2Ah.
- External charger 24 V, 1.5A.

Technical data MLP 90 E

Model	MLP 90 E
Art.-No. MLP 90 E	192104069
Art.-No. V-block for transport of rollers	192104090
Art.-No. Mandrel for handling of rollers	192104092
Art.-No. Holder for battery charger	192104093
Capacity, kg	90
Type of wheels	4 steering wheels, 2 with brake
Number of wheels front/rear	2/2
Wheel diameter front/rear, mm	60/100
Lifting range, mm	107–1568
Load center, mm	220
Weight, kg	40
Overall width, mm	519
Overall length, mm	734
Overall height, mm	1912
Ground clearance, mm	86
Platform width, mm	498
Platform length, mm	440
Actuation	electric
Material	steel/aluminium
Battery	2 x 12 V/7.2Ah
Battery charger	100–240 V/1 A

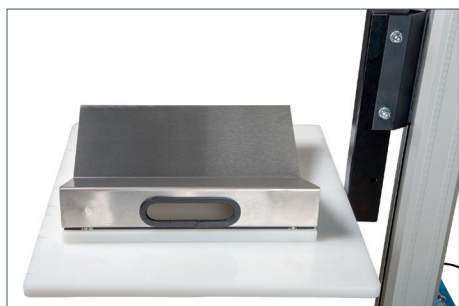

Optional: V-block



Optional: Mandrel

