



## THG Hand clamp

### Capacity 250 kg

The THG hand clamp is suited for the individual transport of light and thin plates. Pressing down on the hand grip releases the tension spring, allowing the clamp to open and slide onto the plate.

The plate can be transported by holding onto the ergonomically designed hand grip.

The positive spring pressure prevents the plate from accidental slipping out of the clamp.

## INFO

The plate surface of the material must not exceed a hardness of HRC 30.

### Technical data THG


Model	Art.-No.	Capacity kg	Jaw capacity mm	Weight kg
THG	N51502415	250	0 - 10	1.4
THG EX <sup>1</sup>	N4300013269	250	0 - 10	1.5
THG EB <sup>2</sup>	N4300007661	250	0 - 10	1.4

<sup>1</sup>EX = Extended handle (L= 300 mm)

<sup>2</sup>EB = Eye bolt (instead of handle)

### Dimensions THG

Model	THG	THG EX	THG EB
A, mm	184	280	610
B, mm	105	105	105
C, mm	12	12	12
D, mm	53	53	53
Thickness, mm	40	40	40

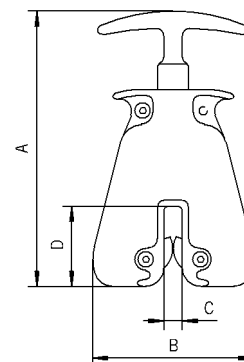

Attaching



Transport