
S3013 MINI

ELECTRIC SCISSOR LIFT

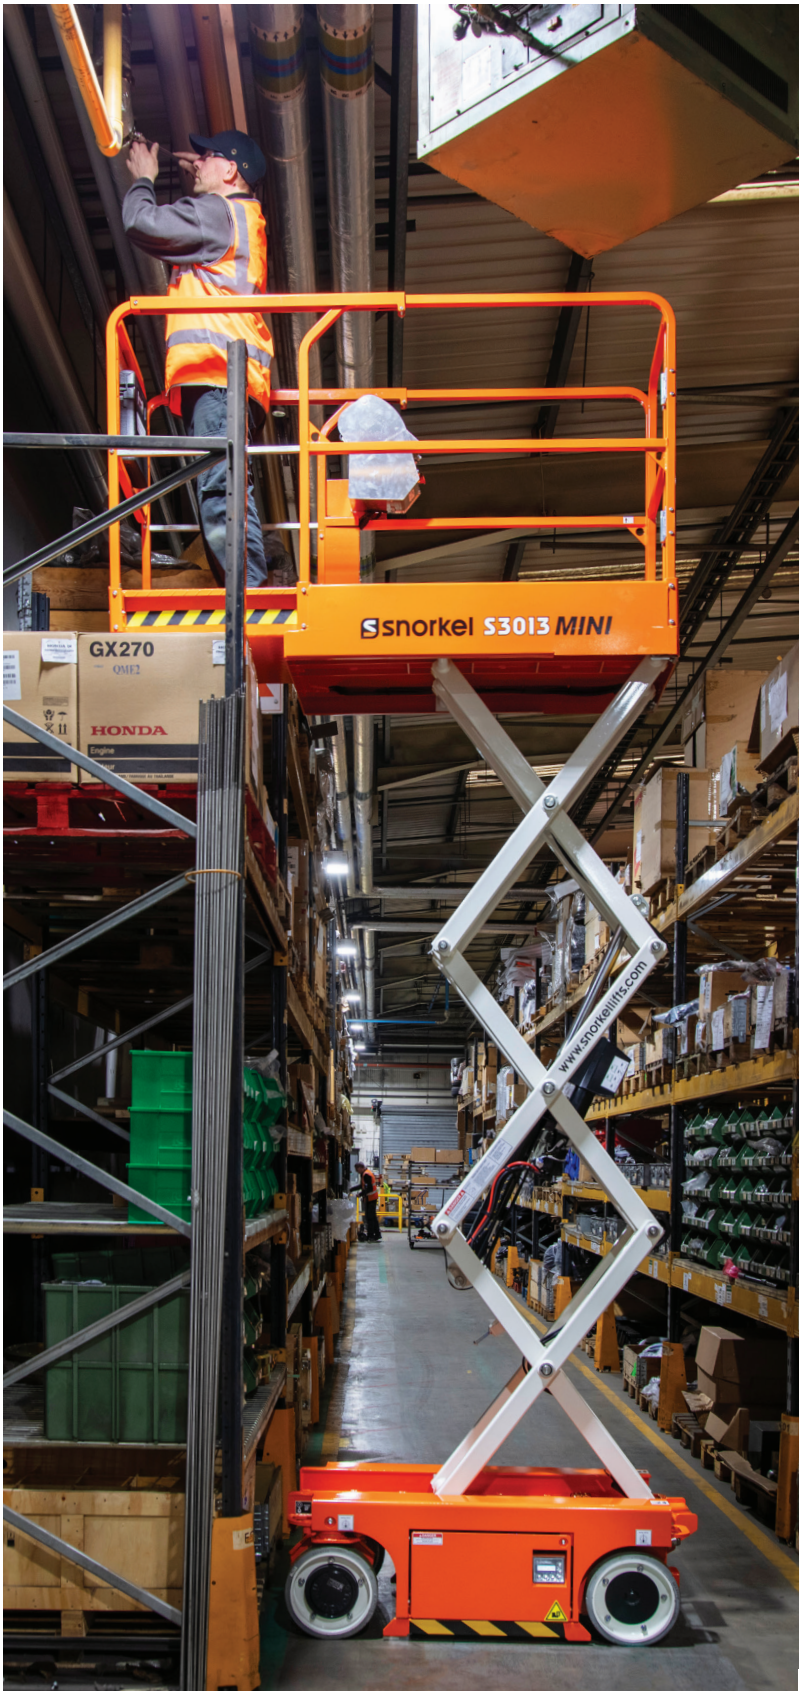

- Electrically operated
- No hydraulic hoses
- Low step-in platform height
- No folding rails
- Fits standard doorways
- Large non-marking tires
- Indoor/Outdoor operation
- Order-picking
- 5-year structural warranty

snorkel™

www.snorkellifts.com

ELECTRIC DRIVE SLAB SCISSOR LIFT

S3013 MINI


DIMENSIONS	
Max. Working Height	6m
Max. Platform Height (**A**)	4m
Platform Size (Stowed)	0.74m x 1.32m
Platform Size (Extended)	0.74m x 1.93m
Deck Extension Length	0.6m
Overall Length (**C**)	1.44m
Overall Width (**D**)	0.76m
Stowed Height (**B**)	1.85m
Ground Clearance (Stowed)	0.06m

PERFORMANCE	
Platform Capacity (SWL)	273kg
Max. Wind Speed	12.5m/s (45km/h)
Max. Drive Height	4m
Max. Drive Speed (Stowed)	3.2km/h
Max. Drive Speed (Elevated)	0.6km/h
Raise/Lower Time	28/18 sec
Gradeability	25%
Max. Operation Slope (side-to-side)	1.5 degrees
Max. Operation Slope (front-to-back)	2 degrees
Inside Turning Radius	0.49m
Outside Turning Radius	1.47m
Tires	0.32m
Controls	Proportional
Drive System	Dual DC Motors
Parking Brake	2-wheel, spring applied


POWER	
Power Source	2 x 12V 104Ah AGM Batteries
Charger	20A

WEIGHT	
Weight	794kg

TURNING RADIUS

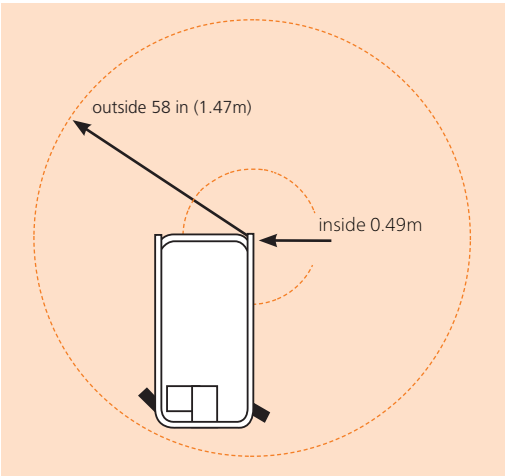

TAKE A TOUR

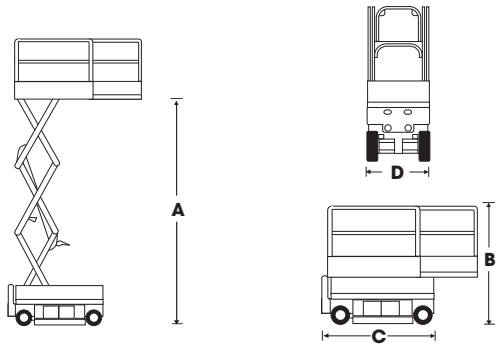

STANDARD FEATURES

- 100% Operation 2 person indoor, 1 person outdoor
- No hydraulic hoses
- Fits standard doorway without folding rails
- Roll-out-deck with dual locks
- Non-marking tires—largest wheels/tires in class
- Heavy-duty spindles/steering
- Heavy-duty fixed control box
- Descent and all-motion alarms
- Proportional control, all functions
- Platform overload protection
- 110 V (15 amp) power to platform
- On-board diagnostics, hour meter, battery meter
- Automatic integrated battery charger
- Manual safety lowering system
- Flashing amber strobe
- Forklift pockets, crane lifting points
- Lanyard attachment points
- Swing-out service trays
- 2-year parts & labor warranty
- 5-year structural warranty

OPTIONAL FEATURES

- Custom paint colours
- Snorkel Guard (Secondary Guarding)

snorkel

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.
Tel: +44 (0) 845 1550 057
Email: sales.emea@snorkellifts.com

www.snorkellifts.com

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.

04/2026